




System TEPRO

TEPRO - Observation Windows - Press Fit

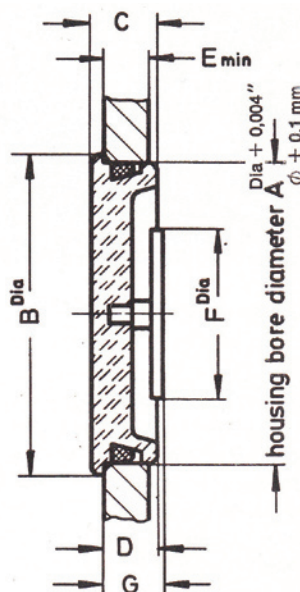

- With grip
- One-step fixation
- Self-locking
- No thread required
- Only thin machine walls required for fixation
- Up to 120° C
- From diameter 75 to 300 mm
- NBR (standard), Viton™ (or equivalent FKM seals) or silicon seals
- Pressure up to 0,6 bar

| Size = Art. No. | D ₁ + 0,1 | D ₂ | L ₁ | L ₂ | L _{3 min} | D ₃ | L ₄ |
|-----------------|----------------------|----------------|----------------|----------------|--------------------|----------------|----------------|
| 75 B* | 75 | 78 | 10 | 8,5 | 6 | 28 | 10 |
| 100 B* | 100 | 103 | 10 | 8,5 | 6 | 28 | 10 |
| 150 B* | 150 | 153 | 10 | 8,5 | 6 | 28 | 10 |
| 200 B* | 200 | 203 | 10 | 8,5 | 6 | — | — |
| 250 B* | 250 | 253 | 12 | 10 | 8 | — | — |
| 300 B* | 300 | 303 | 15 | 12 | 10 | — | — |

*polycarbonate, for temperatures up to 120° C

For further enquiries or orders please contact us:

Teplast GmbH
Hauptstrasse 53
CH-5074 Eiken

Tel: +41 62 8712090
Fax: +41 62 8712190

Email: info@teplast.com
Web: www.teplast.com