




System TEPRO

TEPRO - Oil Circulation Windows - Press Fit

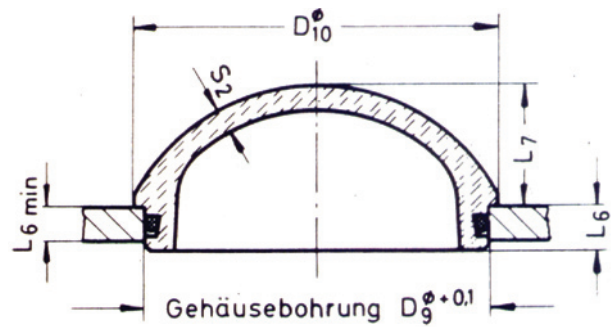

- One-step fixation
- Self-locking
- No thread required
- No machine wall reinforcement needed
- Absolutely oiltight
- NBR (standard), Viton™ (or equivalent FKM seals) or silicon seals
- Extremely stable and fracture resistant, no protective cage required
- Can be mounted vertically or horizontally
- For pressures up to 0,6 bar

| Size = Art. No. | | | | | |
|-----------------|-------------------|----------------|----------------|----------------|-----------------|
| D ₉ | L _{6min} | L ₇ | L ₈ | S ₂ | D ₁₀ |
| 38,1 (1 1/2") | 5 | 21 | 7 | 5 | 41 |
| 75 | 6 | 30 | 8,5 | 5 | 80 |

For further enquiries or orders please contact us:

Teplast GmbH
Hauptstrasse 53
CH-5074 Eiken

Tel: +41 62 8712090
Fax: +41 62 8712190

Email: info@teplast.com
Web: www.teplast.com