




## System TEPRO


### TEPRO Oil Level Windows - Press Fit



without reflector, size 50



with reflector, size 22

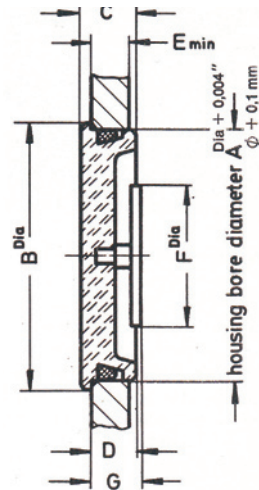

- One-step fixation
- Self-locking
- No thread required
- Only thin machine walls required for fixation
- Absolutely oiltight
- Up to 120° C (version M), up to 70° C (standard)
- From diameters 22 to 300 mm
- NBR (standard), Viton™ (or equivalent FKM seals) or silicon seals
- With or without reflector
- Oil level markings with screen print according to your master
- Pressure up to 0,6 bar, then guard ring

Size = Art. No.	D <sub>1</sub> + 0,1	D <sub>2</sub>	L <sub>1</sub>	L <sub>2</sub>	L <sub>3 min</sub>	D <sub>3</sub>	L <sub>4</sub>
22 (M)	22,2	25	8,5	7	5	19	10
32 (M)	32	35	8,5	7	5	28	10
38 (M)	38,1	41	8,5	7	5	28	10
50 (M)	50	53	10	8,5	6	28	10
75 (M)	75	78	10	8,5	6	28	10
100 (M)	100	103	10	8,5	6	28	10
150 (M)	150	153	10	8,5	6	28	10
200 (M)	200	203	10	8,5	6	—	—
250 (M)	250	253	12	10	8	—	—
300 (M)	300	303	15	12	10	—	—

\* standard = acrylic plastic, for temperatures up to 70° C

\* M = polycarbonate, for temperatures up to 120° C

\*\* reflector included up to size 38

For further enquiries or orders please contact us:

Teplast GmbH  
Hauptstrasse 53  
CH-5074 Eiken

Tel: +41 62 8712090  
Fax: +41 62 8712190

Email: info@teplast.com  
Web: www.teplast.com